



WARNING:

Risk of electric shock. Before installation, disconnect power to the luminaire. Failure to do so may result in electric shock and lead to injury or death.

CAUTION:

For your safety, read and understand instructions completely prior to installation. Installation requires knowledge of luminaire electrical system. If not qualified, **DO NOT** attempt installation. Contact a qualified electrician if necessary.

NOTE: Before beginning the installation, carefully unpack and identify all parts. **Save these instructions, you may need them for later.**
These instructions are only for ELIUM® Gear Adjustable trims, NOT Wall Wash Trims

Step 1: Pull downwards on the trim face plate to remove it from the trim body **Fig. 1**.

Step 2: Rotate the lamp holder to aim the light. Once the target position has been set, tighten the set screw using the 1/8" Allen Key (LU332ALLEN) to lock it in place **Fig. 2**.

Disclaimer: Not available for 2" Elium® trims.

Step 3: Insert the 1/8" Allen Key into the adjustment dial and turn to the desired tilting angle. Rotate counterclockwise to increase the tilt and rotate counterclockwise to decrease the tilt **Fig. 3**.

Disclaimer: 2" Elium® trims are hand adjusted and locked with Allen key.

Step 4: Tuck the safety cable into a corner to avoid obstructing the light and push the trim plate until flush to the trim body **Fig. 4**.

Disclaimer: 2" Elium® trims may not include safety cable.

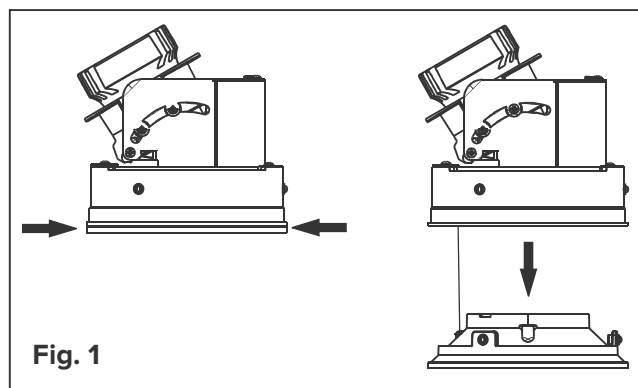


Fig. 1

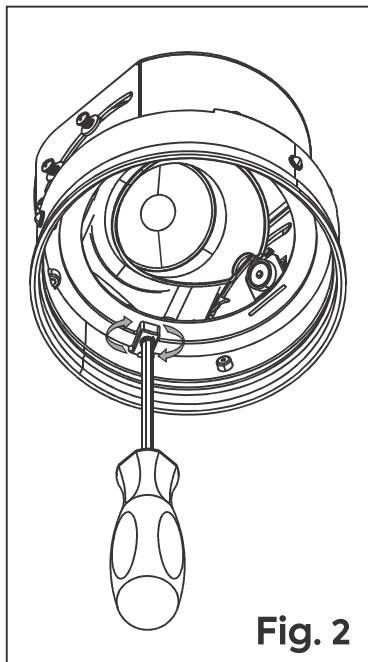


Fig. 2

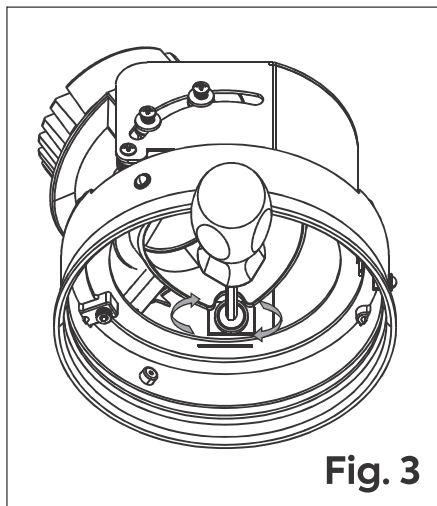


Fig. 3

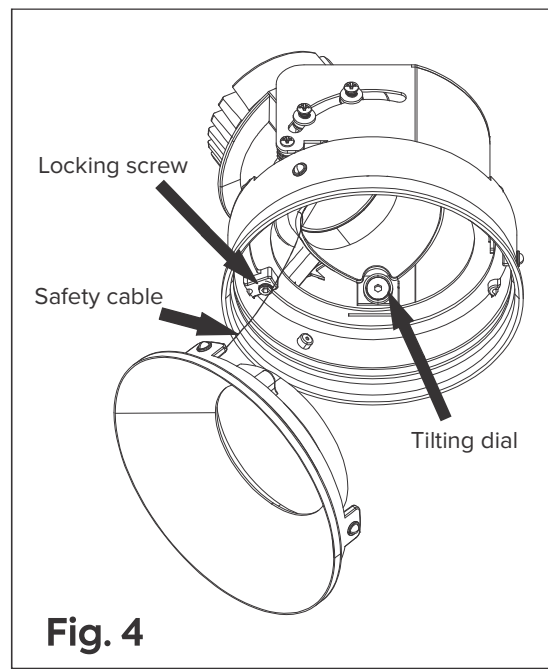


Fig. 4