

Project Name: _____

Fixture Type: _____

Date: _____



4" ELIUM™ Gear Adjustable Downlights

IC Rated, up to 2000 lumens. 120-277V, Triac, ELV, 0-10V, DALI-2, Lutron, eldoLED. New Construction. Round, Square, Flanged and Flangeless.

4" ELIUM TRIMS



Round Bevel



Round Pinhole



Round Wall Wash



Square Bevel



Square Pinhole



Square Wall Wash



Flangeless Round
Bevel



Flangeless Round
Pinhole



Flangeless Round
Wall Wash



Flangeless Square
Bevel



Flangeless Square
Pinhole



Flangeless Square
Wall Wash

FEATURES

- 3 Part System: Frame, Module, & Trim
- UL Listed for direct contact with insulation
- Title 24 JA8-2025-E
- Lockable gear adjustment up to 40° center axis tilt and 359° rotation, adjusted with 3/32" Allen Key from below the ceiling
- Patented LED Module with in field changeable optics
- Standard Dimming to 1% with 0-10V, Triac and ELV dimmers. Optional 0.1% dimming
- Compatible with ceilings up to 2" thick (2" thick ceilings may limit tilt)
- Flanged and flangeless options
- Precision single piece die-cast trims
- 50,000 hours lifespan L70
- Compatible with sloped ceilings from 2/12 - 8/12

SPECIFICATIONS

WATTAGE:	5W – 19W
LUMENS:	750 lm – 2000 lm
VOLTAGE:	120-277V
COLOR TEMP:	2400K, 2700K, 3000K, 3500K, 4000K, Sunset Dim to Warm
DIMMABLE:	0-10V, Triac, ELV (1%), 0-10V (0.1%), DALI-2 (0.1%), LUTRON ATHENA (0.1%)
UL LISTED:	Damp & Wet location options
BEAM ANGLE:	15°, 24°, 36°, 50°
CRI:	95+

4" ELIUM™ 3-PART SYSTEM: HOUSING, MODULE & TRIM




LOCKABLE HOT AIMING GEAR ADJUSTMENT FROM BELOW

Adjustability



Hot Aiming from below the ceiling using a $\frac{3}{32}$ " Allen Key

Rotation Lock



359° Lockable Rotation with $\frac{3}{32}$ " Allen Key*

Lockable Gear Adjustment



Easy access for quick and effortless adjustments from below the ceiling



* $\frac{3}{32}$ " Allen Key (**LU332ALLEN**) ordered separately

1. Specify housing part number		HOUSING				Example: LU45RDX07ICA	
ELIUM	SIZE	STYLE	DRIVER	LUMENS/WATTAGE	ICA	OPTIONAL EM	
LU							
LU	45	4"	RD Round	X 120-277V, 0-10V, Triac/ELV (1%)	07 750 lm (6W)	ICA IC Airtight, 5 1/2" Height	(Blank) No EM
		SQ Square	ED ¹ eldoLED, 0-10V (0.1%)	10 1000 lm (8W)	AJA ICA for R60 Insulation & Chicago Plenum, 5 1/2" Height	E5 ³ 25W EM, 90 min	
			AL ¹ eldoLED, DALI-2 (0.1%)	12 1250 lm (11W)	CSH ² IC Airtight Shallow, 4" Height	E7 ^{4,5} 15W EM, 90 min	
			LN ¹ Lutron Athena Node	15 1500 lm (14W)			
				20 2000 lm (19W)			

¹ Special order, extended lead time of 2-10 weeks may apply. ² Available up to 1500 (14W), not available with 2000 lm (19W) ³ Access from above required. ⁴ Internal EM accessible from below.

⁵ Not available for CSH - shallow housing

2. Specify module part number		MODULE		Example: LU2430D-S	
ELIUM	TYPE	COLOR TEMPERATURE		BEAM	
LU					
LU	24 CREE PRO9 Chip, CRI 95+	24D	2400K	-S	15° ²
		27D	2700K	-N	24°
		30D	3000K	-F	36°
		35D	3500K	-W	50°
		40D	4000K	-XX	36° installed, with 15°, 24° & 50° lenses included
19	LED COB	SD	Dim to Warm Bridgelux, 3000K to 1800K ¹		
		GND	Dim to Warm Luminus, 3000K to 2000K ³		
		AMD	Turtle Friendly Amber LED ⁴		

¹ Automatically dims from 3000K to 1800K. SD Module for use with 1250 lm (11W) and 1500lm (14W) Housings only

² Not for 19 option

³ Automatically dims from 3000K to 2000K. GND Module for use with 1250 lm (11W) and 1500lm (14W) Housings only

⁴ AMD Module for use with 750 lm (6W), 1000 lm (8W), 1250 lm (11W) and 1500 lm (14W) Housings only.

SECONDARY MODULE OPTICS*				
L45	L57	L51	L49	L47
Black Louver	White Louver	CCT Reducer	Frosted Lens	Solite Lens

*Module Fits up to 4 secondary optics

3. Specify trim part number		TRIM				Example: LU45RD10T72W	
ELIUM	SIZE	SHAPE	STYLE	TRIM	LENS	FINISH	
LU							
LU	45	4"	RD Round	10 Bevel	T Flanged ²	(Blank) Open, No Lens ^{5,7}	W All White ⁹
		SQ Square	27 Pinhole	LS Flangeless ^{3,4}	72 Clear Lens ^{6,7}	BB All Black	BZ All Bronze
			33 Wall Wash ¹		83 Solite Lens ^{6,7}	CC Custom Color	HH All Haze
					94 Linear Lens ^{6,8}	HW Haze with White Flange ¹⁰	
					61 Sauna/Steam Lens ¹¹		

¹ Requires Linear Lens (94 lens option)

² For ceiling thickness up to 2"

³ Works with all ceiling thicknesses (2"+ thick ceilings may limit adjustment). Millwork adapter adjusts 7/16" - 7/8" for wood ceiling layer

⁴ Requires Spackle Frame or Millwork Adapter ordered separately

⁵ Damp Location

⁶ Wet Location

⁷ Not available for Wall Wash Trim

⁸ For Wall Wash trim only

⁹ White trims are field paintable

¹⁰ For Flanged Bevel and Wall Wash only

¹¹ Sauna & Steam Room Lensed Trim. Only compatible up to 1000 lm (8W) housings.



Accessories		
SPACKLE FRAME FOR FLANGELESS	MILLWORK ADAPTER FOR FLANGELESS	ALLEN KEY
Round: LU45RDSF Square: LU45SQSF	Round: LU45RDWC Square: LU45SQWC	LU332ALLEN

PRODUCTS

Housings





4" ROUND

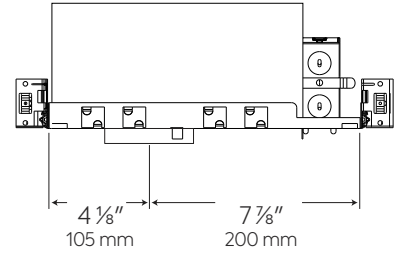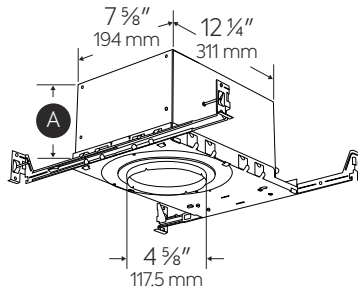

4" SQUARE

45° bidirectional collar rotation
for square alignment

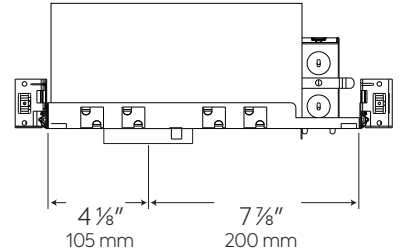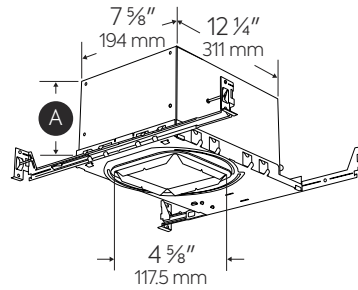


A ICA & AJA Standard: Height - 5 1/2" (140 mm)
CSH Shallow: Height - 4" (101.5 mm)


Module



ELIUM Module



Accessories



Black Louver
L45



White Louver
L57



CCT Reducer
L51



Frosted Lens
L49



Lenses
LUP15D (15°)
LUP24D (24°)
LUP36D (36°)
LUP50D (50°)

Trims



Round Bevel



White


Bronze

Haze/White
Flange



Black

All Haze

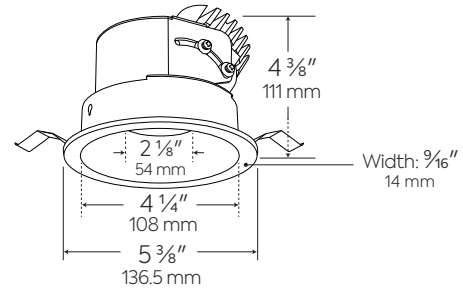

Round Pinhole




White

Bronze



Black

All Haze



Round Wall Wash



White



Bronze

Haze/White
Flange




Black

All Haze

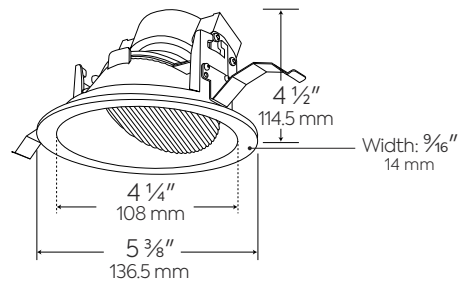

Square Bevel



White



Bronze

Haze/White
Flange



Black

All Haze

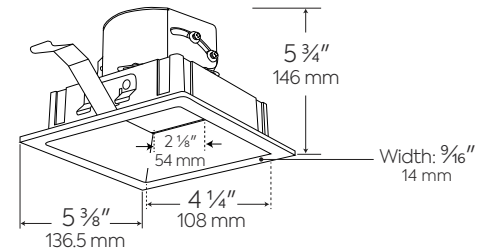

Square Pinhole




White

Bronze



Black


All Haze





Trims




Square Wall Wash

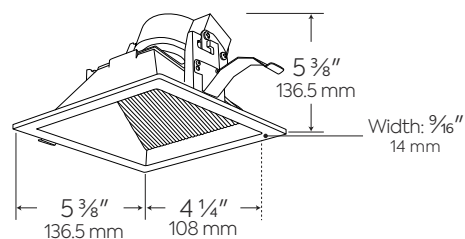

Flangeless Round Bevel





Spackle Frame
Ordered Separately




Millwork Adapter
(Ordered Separately)
Adjusts 3/4" (11mm) - 7/8" (22mm)
for wood layer.



Flangeless Round Pinhole





Spackle Frame
Ordered Separately




Millwork Adapter
(Ordered Separately)
Adjusts 3/4" (11mm) - 7/8" (22mm)
for wood layer.



Flangeless Round Wall Wash





Spackle Frame
Ordered Separately




Millwork Adapter
(Ordered Separately)
Adjusts 3/4" (11mm) - 7/8" (22mm)
for wood layer.



Flangeless Square Bevel



Spackle Frame
Ordered Separately






Millwork Adapter
(Ordered Separately)
Adjusts 3/4" (11mm) - 7/8" (22mm)
for wood layer.


Trims



Flangeless Square Pinhole






Spackle Frame
Ordered Separately




Millwork Adapter
(Ordered Separately)
Adjusts 3/8" (11mm) - 3/4" (22mm)
for wood layer.



Flangeless Square
Wall Wash



Spackle Frame
Ordered Separately



Millwork Adapter
(Ordered Separately)
Adjusts 3/8" (11mm) - 3/4" (22mm)
for wood layer.

Fire Rated Products and Accessories

1-HOUR FIRE ENCLOSURE FOR RECESSED FIXTURES



FIREENCL
Standard - 9" H x 20 3/8" L x 14 3/8" W,
(228.5" mm H x 517.5" mm L x 365" mm)

FIREENCL-S
Shallow (-S) - 7 1/4" H x 16" L x 14 3/8" W
(184" mm H x 506.5" mm L x 365" mm W)

Provides fire barrier around recessed lights.
ETL approved 1-hour fire rating. Meets UL
263, ASTM E119 Specifications. To be used
with Mica Tape to seal the power feeding
point. (FIRETAPE sold separately)

MICA ADHESIVE FIRE TAPE FOR FIRE ENCLOSURE



FIRETAPE 3/4" W x 16" L,
(19 mm W x 405.6 mm L)

Fire proof mica adhesive tape helps seal the
power feeding point on Fire Enclosure. Offers
outstanding high temperature and flame
resistance, and provides excellent electrical
insulation.

2-HOUR FIRE COVER FOR RECESSED FIXTURES



FIRECVR
9 3/4" H x 17" O.D. x 13" I.D.
(501.5 mm H x 432 mm O.D. x 330 mm I.D.)

Made of heat activated intumescent
material. UL approved for most ceiling types:
sheetrock drywall, gypsum & acoustical tiles. UL
Rated enclosure stops flame spread and heat
transmission for up to 2 hours.

TECHNICAL SPECIFICATIONS

The ELIUM Downlight is a modular, high-performance recessed lighting system designed for versatility and ease of installation. The system consists of three key components: Housing, Module, and Trim Mechanism. The module securely twists onto the trim mechanism and connects to the housing via a quick-connect system. Both the module and driver are fully serviceable from below the ceiling.

HOUSING:

- Designed for ceiling plenums with 2 x 6 joists or taller.
- High-strength hanger bars can be easily nailed to wood joists or slid onto T-Grid drop ceilings. Adjustable from 7.5" to 24" Wide.
- Universal housing works with flanged, flangeless & millwork applications.
- Accessible driver mounted on the frame for easy servicing.
- Rotatable square collar ensures precise square alignment.
- Knockouts for easy wiring: Seven 1/2" trade-size conduit knockouts and 4 EZ-Romex cable traps for easy wiring.
- R60 housing has two 1/2" trade size conduit knockouts.

EMERGENCY OPTIONS:

- 90-minute emergency battery backup with remote test switch.
- 15W emergency backup accessible from below the ceiling.
- 25W emergency backup requires access from above.

OPTICS:

- Precision-engineered PIR optics available in 15°, 24°, 36° and 50° beam spreads
- Field-changeable secondary lenses available—no accessory holder required. Module can hold up to 4 secondary lenses.

LED TECHNOLOGY:

- 95+ CRI for exceptionally accurate color rendering.
- 50,000-hour L70 lifespan based on LM80 test standards.
- Advanced thermal management with integrated heat sink.
- Instant-on to full brightness with no visible LED pixilation.

SUNSET DIMMING:

- Dim-to-warm LED technology: Color temperature automatically warms as it dims.
- 3000K at full brightness, dimming smoothly down to 1800K.
- To order, select an item with "Sunset SD" in the Color Temperature (CCT) attribute.

ADJUSTABILITY:

- Adjustable from below the ceiling while keeping the light centered with the trim opening.
- 40° tilt adjustment, set using a 3/32" Allen key with an Automatic locking mechanism ensures secure positioning. Lockable 359° rotation for precise aiming.
- Lockable 359° rotation for precise aiming.

TRIM:

- Diecast aluminum powder coated trim.
- White finish is field paintable.

MODULE - LUMEN MULTIPLIER

CCT	MULTIPLIER	BEAM ANGLE	MULTIPLIER	LENSES	MULTIPLIER
2700K	0.96	15°	0.84	L45 - Black Louver	0.95
3000K	1	24°	0.89	L57 - White Louver	0.96
3500K	1.05	36°	1	L47 - Optic Spread	0.93
4000K	1.085	50°	1.065	L49 - Frosted Lens	0.85
SD	0.80			L51 - CCT Reducer	0.90
				Trim 72 - Clear Lens	0.95
				Trim 83 - Solite Lens	0.87

DIMMER COMPATIBILITY CHART

FOR REFERENCE ONLY

Testing conducted by ELIUM Lighting is not a substitute for and does not imply certification by an independent laboratory or any other standards certification. Refer to manufacturer specifications for more detailed information on product certifications and standards. Consult the dimmer manufacturer prior to installation to ensure compatibility.

MANUFACTURER	PRODUCT	PART NUMBER	DIMMED LIGHT OUTPUT RANGE
120V - Triac/ELV Dimmers for LU37RD Series, LU37SQ Series, LU45RD Series & LU45SQ Series			
Leviton	120V AC 60Hz, 300W Electronic Low Voltage, 400 Volt Amp, Single Pole, 3-Way	IPE04	1% - 100%
	120V AC 60Hz, 300W CFL or 600W Incandescent, 400 Volt Amp, Single Pole, 3-Way	6673-10W	1% - 100%
	120V AC, 600W Incandescent with LED Locator, Single Pole, 3-Way	VP106	1% - 100%
	120V AC 60Hz, 500W Incandescent with LED Level Indicator, Single Pole, 3-Way	6161	1% - 100%
	120V AC, 150W LED/CFL or 600W Incandescent, Single Pole, 3-Way	6674	1% - 100%
Lutron	120V AC, 150W LED/CFL or 600W Incandescent/Halogen, Single Pole, 3-Way	RRD-6CL	1% - 100%
	120V AC 60Hz, 150W LED/CFL/Incandescent/Halogen, Single Pole, 3-Way	DVCL-153P	1% - 100%
	120V 60Hz, 150W LED/CFL or 600W Incandescent/Halogen, Single Pole, 3-Way	TGCL-153P	1% - 100%
	120V AC 60Hz, 300W Electronic Low Voltage, 3-Way, Commercial/Residential Application	DVELV-303P	1% - 100%
	120V, 600W Incandescent/Halogen, Single Pole, Residential Indoor Application	TG-600P	1% - 100%
	120V, 1000W Incandescent or 600W Magnetic Low Voltage, Single Pole, 3-Way	CT103P	1% - 100%
	120V AC 60Hz, 600W Electronic Low Voltage, Single Pole/Multi-Location	MAELV600	1% - 100%
	120V AC 60Hz, 500W Electronic Low Voltage, Single Pole/Multi-Location	FAELV500	1% - 100%
	120V AC 60Hz, 600W Incandescent/Halogen, Single Pole, Slide-to-Off Dimmer	S-600P	1% - 100%
	120V AC 60Hz, 150W LED/CFL or 600W Incandescent/Halogen, Single Pole, 3-Way	SCL-153P	1% - 100%
	Caséta® Wireless Dimmer	PD-6WCL	1% - 100%
	120V AC 60Hz, Low Voltage Load Type, 150W Single Pole	DVLV-600P	5% - 100%
	120V AC, 60Hz, 600W Incandescent/Halogen, Single Pole, 3-Way, Residential and Commercial Application	DV-603P	1% - 100%
	120V AC, 50/60Hz, 150W LED/CFL, 600W Incandescent/Halogen, Single Pole, 3-Way, Indoor Application	MA-PRO	1% - 100%
	120V AC 60Hz, 150W LED/CFL or 600W Incandescent/Halogen, Single Pole, 3-Way	MACL-153M	1% - 100%

***NOTE: Refer to dimmer manufacturer's documentation for installation instructions and circuit details**

Disclaimer: Minimum and maximum loads for LEDs and CFLs are given in number of lamps and may vary depending on the lamp being used. Testing conducted by ELCO Lighting is not a substitute for and does not imply certification by an independent laboratory or any other standards certification. Refer to manufacturer specifications for more detailed information on product certifications and standards.

Integrating our lighting with your Smart Home System is a breeze. Simply check your Smart Home system for compatible smart switches and cross reference that with our Dimming Compatibility Chart. Once the switches are integrated with your Smart Home system your lights will be ready to go.



DIMMER COMPATIBILITY CHART

FOR REFERENCE ONLY

Testing conducted by ELIUM Lighting is not a substitute for and does not imply certification by an independent laboratory or any other standards certification. Refer to manufacturer specifications for more detailed information on product certifications and standards. Consult the dimmer manufacturer prior to installation to ensure compatibility.

MANUFACTURER	PRODUCT	PART NUMBER	DIMMED LIGHT OUTPUT RANGE
120V - Triac/ELV Dimmers for LU37RD Series, LU37SQ Series, LU45RD Series & LU45SQ Series			
Eaton	120V AC, 300W LED/CFL or 600W Incandescent/MLV/Halogen, Single Pole, 3-Way	TAL06P1-C1	1% - 100%
Cooper	120V AC 60Hz, 300W LED/CFL or 600W Incandescent/Halogen, Single Pole, 3-Way	SLC03P / DAL06P	1% - 100%
	120V AC 60Hz, 300W LED/CFL or 600W Incandescent, Single Pole, 3-Way, Residential	DLC03P	1% - 100%
	120V AC 60Hz, 600W Incandescent/Halogen, Single Pole, 3-Way	RI061-VW-K2	1% - 100%
	120V AC 60Hz, 300W LED/CFL/ Incandescent/Halogen, Single Pole, 3-Way	AAL06A-C2	1% - 100%
Lightolier	120V, 260W Incandescent/Halogen, Single Pole, 3-Way	ZP260QEW	1% - 100%
0-10V Type Dimmers - 120/277V for LU37RD Series, LU37SQ Series, LU45RD Series & LU45SQ Series			
Lutron	120/277V AC, 0-10V LED/CFL Ballast, Single Pole, 3-Way	NFTV	1% - 100%
	120/277V AC, 0-10V, Single Pole, 3-Way, Commercial and Residential, Indoor Application	DVSTV	1% - 100%
	120/277V AC 50/60Hz, 0-10V LED/CFL Ballast, Single Pole, 3-Way, Indoor Application	DVTV	1% - 100%
Leviton	120/277V AC 60Hz, 0-10V LED/CFL Ballast, Single Pole, 3-Way	IP710-DL	1% - 100%

***NOTE: Refer to dimmer manufacturer's documentation for installation instructions and circuit details**

Disclaimer: Minimum and maximum loads for LEDs and CFLs are given in number of lamps and may vary depending on the lamp being used. Testing conducted by ELCO Lighting is not a substitute for and does not imply certification by an independent laboratory or any other standards certification. Refer to manufacturer specifications for more detailed information on product certifications and standards.

Integrating our lighting with your Smart Home System is a breeze. Simply check your Smart Home system for compatible smart switches and cross reference that with our Dimming Compatibility Chart. Once the switches are integrated with your Smart Home system your lights will be ready to go.

