

Project Name: _____

Fixture Type: _____

Date: _____



3" ELIUM™ Gear Adjustable Downlights

IC Rated, up to 2000 lumens. 120-277V, Triac, ELV, 0-10V, Dali 2, Lutron, EldoLed. New Construction. Round, Square, Flanged and Flangeless.

3" ELIUM TRIMS




Round Bevel



Round Pinhole



Round Wall Wash



Square Bevel



Square Pinhole



Square Wall Wash



Flangeless Round
Bevel




Flangeless Round
Pinhole




Flangeless Round
Wall Wash



Flangeless Square
Bevel



Flangeless Square
Pinhole



Flangeless Square
Wall Wash

FEATURES	SPECIFICATIONS
3 Part System: Frame, Module, & Trim - UL Listed for direct contact with insulation - Title 24 JA8-2022-E - Lockable gear adjustment up to 35° center axis tilt and 359° rotation, adjusted with 1/8" Allen Key from below the ceiling - Patented LED Module with in field changeable optic - Standard Dimming to 1% with 0-10V, Triac and ELV dimmers. Optional 0.1% dimming - Compatible with ceilings up to 2" thick (2" thick ceilings may limit tilt) - Flanged and flangeless options - Precision single piece die-cast trims 50,000 hours lifespan L70	WATTAGE: 5W – 19W
	LUMENS: 750 lm – 2000 lm
	VOLTAGE: 120-277V
	COLOR TEMP: 2400K, 2700K, 3000K, 3500K, 4000K, Sunset Dim to Warm
	DIMMABLE: 0-10V, Triac, ELV (1%), 0-10V (0.1%), Dali2 (0.1%), LUTRON HI-LUME (0.1%)
	BEAM ANGLE: 15°, 24°, 36°, 50°
	UL LISTED: Damp & Wet location options
	CRI: 95+

3" ELIUM™ 3-PART SYSTEM: HOUSING, MODULE & TRIM




LOCKABLE HOT AIMING GEAR ADJUSTMENT FROM BELOW

Adjustability



Hot Aiming from below
the ceiling using
a 1/8" Allen Key

Rotation Lock



359° Lockable Rotation
with 1/8" Allen Key*

Lockable Gear Adjustment



Easy access for quick
and effortless adjustments
from below the ceiling



* 1/8" Allen Key (**LU332ALLEN**) ordered separately

1. Specify housing part number

HOUSING

Example: LU37RDX07ICA

ELIUM	SIZE	STYLE	DRIVER	LUMENS/WATTAGE	ICA	OPTIONAL EM
LU						
LU	37 3"	RD Round	X 120-277V, 0-10V, Triac/ELV 1%	07 750 lm (6W)	ICA IC Airtight	(Blank) No EM
		SQ Square	ED EldoLed, 0-10V 0.1%	10 1000 lm (8W)	AJICA ICA for R60 Insulation and Chicago Plenum	EM5 25W EM, 90 min ¹
			AL EldoLed, Dali 2 0.1%	12 1250 lm (11W)		EM7 15W EM, 90 min ²
			LN Lutron, Hi-Lume	15 1500 lm (14W)		
				20 2000 lm (19W)		

¹ Access from above required
² Internal EM accessible from below

2. Specify module part number

MODULE

Example: LUM2430D-S

ELIUM	TYPE	COLOR TEMPERATURE	BEAM
LU			
LU	24 CREE PRO9 Chip, CRI 95+	24D 2400K	-S 15° ²
		27D 2700K	-N 24°
		30D 3000K	-F 36°
		35D 3500K	-W 50°
		40D 4000K	
19 Bridgelux Dim to Warm, 3000K to 1800K		SD Sunset Dim to Warm ¹	

¹ Automatically dims from 3000K to 1800K. SD Module for use with 1250 lm (11W) and 1500lm (14W)* Housings only ² Not for SD option

SECONDARY MODULE OPTICS*

L45	L57	L51	L49	L58
Black Louver	White Louver	CCT Reducer	Frosted Lens	Solite Lens

*Module Fits up to 4 secondary optics

3. Specify trim part number

TRIM

Example: LU37RD10T72W

ELIUM	SIZE	SHAPE	STYLE	TRIM	LENS	FINISH
LU						
LU	37 3"	RD Round	10 Bevel	T Flanged ²	(Blank) Open, No Lens ^{5,7}	W All White
		SQ Square	27 Pinhole	LS Flangeless ^{3,4}	72 Clear Lens ^{6,7}	BB All Black
			33 Wall Wash ¹		83 Difused Lens ^{6,7}	
					94 Linear Lens ^{6,8}	

¹ Requires Linear Lens (94 lens option)

² For ceiling thickness up to 2"
³ For ceiling thickness up to 3.5"
⁴ Requires Spackle Frame, ordered Separately

⁵ Damp Location
⁶ Wet Location
⁷ Not available for Wall Wash Trim
⁸ For Wall Wash trim only

ACCESSORIES

ROUND SPACKLE FRAME

SQUARE SPACKLE FRAME

ALLEN KEY

LU37RDSF

LU37SQSF

LU332ALLEN



eliumlighting.com

orders@eliumlighting.com

(323) 231 - 2090


Elum reserves the right to make specification and design changes without notification.

PRODUCTS


Housings



3" HOUSING Round



3" HOUSING Square




25° collar rotation
for square alignment


Module



ELIUM Module



Accessories



Black Louver
L45



White Louver
L57



CCT Reducer
L51



Frosted Lens
L49



Solite Lens
L58



Lenses
LUP15D (15°)
LUP24D (24°)
LUP36D (36°)
LUP50D (50°)

Trims




Round Bevel



White



Black




Round Pinhole



White



Black

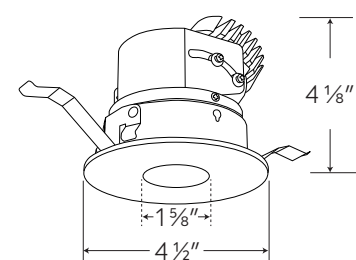





Round Wall Wash



White

Black





Square Bevel



White

Black

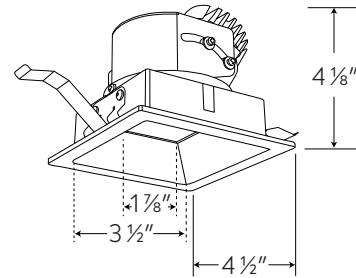


Square Pinhole



White

Black

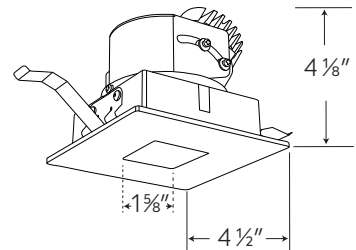


Square Wall Wash



White

Black





Flangeless Round Bevel



White

Black



Spackle Frame
Ordered Separately





Flangeless Round Pinhole



White



Black




Spackle Frame
Ordered Separately





Flangeless Round Wall Wash



White



Black



Spackle Frame
Ordered Separately





Flangeless Square Bevel



White




Black



Spackle Frame
Ordered Separately





Flangeless Square Pinhole




White



Black




Spackle Frame
Ordered Separately





Flangeless Square Wall Wash



White



Black



Spackle Frame
Ordered Separately

TECHNICAL SPECIFICATIONS

The ELIUM Downlight is a modular, high-performance recessed lighting system designed for versatility and ease of installation. The system consists of three key components: Housing, Module, and Trim Mechanism. The module securely twists onto the trim mechanism and connects to the housing via a quick-connect system. Both the module and driver are fully serviceable from below the ceiling.

HOUSING:

Designed for ceiling plenums with 2 x 6 joists or taller.

- High-strength hanger bars can be easily nailed to joists.
- Compatible with T-grid and drop ceiling applications.
- Adjustable hanger bars extend from 7.5" to 24".
- Accessible driver mounted on the frame for easy servicing.
- Rotatable square collar ensures precise square alignment.
- Knockouts for easy wiring:
 - Two 3/4" knockouts
 - Seven 1/2" trade-size conduit knockouts
 - One 3/8" knockout
 - Four pry-out knockout slots for Romex wiring

EMERGENCY OPTIONS:

- 90-minute emergency battery backup with remote test switch.
- 15W emergency backup accessible from below the ceiling.
- 25W emergency backup requires access from above.

OPTICS:

- Precision-engineered PIR optics available in 15°, 24°, 36° and 50° beam spreads.
- Field-changeable secondary lenses available—no accessory holder required. Module can hold up to 4 secondary lenses.

LED TECHNOLOGY:

CREE COB LED for superior performance.

- 95+ CRI for exceptionally accurate color rendering.
- 50,000-hour L70 lifespan based on LM80 test standards.
- Advanced thermal management with integrated heat sink.
- Instant-on to full brightness with no visible LED pixilation.

SUNSET DIMMING:

- Dim-to-warm LED technology: Color temperature automatically warms as it dims.
- 3000K at full brightness, dimming smoothly down to 1800K.
- To order, select an item with "Sunset SD" in the Color Temperature (CCT) attribute.

ADJUSTABILITY:

- Adjustable from below the ceiling while keeping the light centered with the trim opening.
- 35° tilt adjustment, set using a 1/8" Allen key with an Automatic locking mechanism ensures secure positioning.
- Lockable 359° rotation for precise aiming.

MODULE - LUMEN MULTIPLIER

CCT	MULTIPLIER	BEAM ANGLE	MULTIPLIER
2700K	0.96	15°	0.84
3000K	1	24°	0.89
3500K	1.05	36°	1
4000K	1.085	50°	1.065
SD	0.80		

DIMMER COMPATIBILITY CHART

FOR REFERENCE ONLY

Testing conducted by ELIUM Lighting is not a substitute for and does not imply certification by an independent laboratory or any other standards certification. Refer to manufacturer specifications for more detailed information on product certifications and standards. Consult the dimmer manufacturer prior to installation to ensure compatibility.

MANUFACTURER	PRODUCT	PART NUMBER	DIMMED LIGHT OUTPUT RANGE
120V – Triac/ELV Dimmers for LU37RD Series, LU37SQ Series, LU45RD Series & LU45SQ Series			
Leviton	120V AC 60Hz, 300W Electronic Low Voltage, 400 Volt Amp, Single Pole, 3-Way	IPE04	1% – 100%
	120V AC 60Hz, 300W CFL or 600W Incandescent, 400 Volt Amp, Single Pole, 3-Way	6673-10W	1% – 100%
	120V AC, 600W Incandescent with LED Locator, Single Pole, 3-Way	VP106	1% – 100%
	120V AC 60Hz, 500W Incandescent with LED Level Indicator, Single Pole, 3-Way	6161	1% – 100%
	120V AC, 150W LED/CFL or 600W Incandescent, Single Pole, 3-Way	6674	1% – 100%
Lutron	120V AC, 150W LED/CFL or 600W Incandescent/Halogen, Single Pole, 3-Way	RRD-6CL	1% – 100%
	120V AC 60Hz, 150W LED/CFL/Incandescent/Halogen, Single Pole, 3-Way	DVCL-153P	1% – 100%
	120V 60Hz, 150W LED/CFL or 600W Incandescent/Halogen, Single Pole, 3-Way	TGCL-153P	1% – 100%
	120V AC 60Hz, 300W Electronic Low Voltage, 3-Way, Commercial/Residential Application	DVELV-303P	1% – 100%
	120V, 600W Incandescent/Halogen, Single Pole, Residential Indoor Application	TG-600P	1% – 100%
	120V, 1000W Incandescent or 600W Magnetic Low Voltage, Single Pole, 3-Way	CT103P	1% – 100%
	120V AC 60Hz, 600W Electronic Low Voltage, Single Pole/Multi-Location	MAELV600	1% – 100%
	120V AC 60Hz, 500W Electronic Low Voltage, Single Pole/Multi-Location	FAELV500	1% – 100%
	120V AC 60Hz, 600W Incandescent/Halogen, Single Pole, Slide-to-Off Dimmer	S-600P	1% – 100%
	120V AC 60Hz, 150W LED/CFL or 600W Incandescent/Halogen, Single Pole, 3-Way	SCL-153P	1% – 100%
	Caséta® Wireless Dimmer	PD-6WCL	1% – 100%
	120V AC 60Hz, Low Voltage Load Type, 150W Single Pole	DVLV-600P	5% – 100%
	120V AC, 60Hz, 600W Incandescent/Halogen, Single Pole, 3-Way, Residential and Commercial Application	DV-603P	1% – 100%
	120V AC, 50/60Hz, 150W LED/CFL, 600W Incandescent/Halogen, Single Pole, 3-Way, Indoor Application	MA-PRO	1% – 100%
	120V AC 60Hz, 150W LED/CFL or 600W Incandescent/Halogen, Single Pole, 3-Way	MACL-153M	1% – 100%

***NOTE: Refer to dimmer manufacturer's documentation for installation instructions and circuit details**

Disclaimer: Minimum and maximum loads for LEDs and CFLs are given in number of lamps and may vary depending on the lamp being used. Testing conducted by ELCO Lighting is not a substitute for and does not imply certification by an independent laboratory or any other standards certification. Refer to manufacturer specifications for more detailed information on product certifications and standards.

Integrating our lighting with your Smart Home System is a breeze. Simply check your Smart Home system for compatible smart switches and cross reference that with our Dimming Compatibility Chart. Once the switches are integrated with your Smart Home system your lights will be ready to go.



DIMMER COMPATIBILITY CHART

FOR REFERENCE ONLY

Testing conducted by ELIUM Lighting is not a substitute for and does not imply certification by an independent laboratory or any other standards certification. Refer to manufacturer specifications for more detailed information on product certifications and standards. Consult the dimmer manufacturer prior to installation to ensure compatibility.

MANUFACTURER	PRODUCT	PART NUMBER	DIMMED LIGHT OUTPUT RANGE
120V – Triac/ELV Dimmers for LU37RD Series, LU37SQ Series, LU45RD Series & LU45SQ Series			
Eaton	120V AC, 300W LED/CFL or 600W Incandescent/MLV/Halogen, Single Pole, 3-Way	TAL06P1-C1	1% – 100%
Cooper	120V AC 60Hz, 300W LED/CFL or 600W Incandescent/Halogen, Single Pole, 3-Way	SLC03P / DAL06P	1% – 100%
	120V AC 60Hz, 300W LED/CFL or 600W Incandescent, Single Pole, 3-Way, Residential	DLC03P	1% – 100%
	120V AC 60Hz, 600W Incandescent/Halogen, Single Pole, 3-Way	RI061-VW-K2	1% – 100%
	120V AC 60Hz, 300W LED/CFL/ Incandescent/Halogen, Single Pole, 3-Way	AAL06A-C2	1% – 100%
Lightolier	120V, 260W Incandescent/Halogen, Single Pole, 3-Way	ZP260QEW	1% – 100%
0-10V Type Dimmers - 120/277V for LU37RD Series, LU37SQ Series, LU45RD Series & LU45SQ Series			
Lutron	120/277V AC, 0-10V LED/CFL Ballast, Single Pole, 3-Way	NFTV	1% – 100%
	120/277V AC, 0-10V, Single Pole, 3-Way, Commercial and Residential, Indoor Application	DVSTV	1% – 100%
	120/277V AC 50/60Hz, 0-10V LED/CFL Ballast, Single Pole, 3-Way, Indoor Application	DVTV	1% – 100%
Leviton	120/277V AC 60Hz, 0-10V LED/CFL Ballast, Single Pole, 3-Way	IP710-DL	1% – 100%

***NOTE: Refer to dimmer manufacturer's documentation for installation instructions and circuit details**

Disclaimer: Minimum and maximum loads for LEDs and CFLs are given in number of lamps and may vary depending on the lamp being used. Testing conducted by ELCO Lighting is not a substitute for and does not imply certification by an independent laboratory or any other standards certification. Refer to manufacturer specifications for more detailed information on product certifications and standards.

Integrating our lighting with your Smart Home System is a breeze. Simply check your Smart Home system for compatible smart switches and cross reference that with our Dimming Compatibility Chart. Once the switches are integrated with your Smart Home system your lights will be ready to go.






PHOTOMETRIC REPORT

3" Round Bevel

PHOTOMETRIC REPORT	CANDLE POWER SUMMARY	ILLUMINANCE AT A DISTANCE																																																	
Product #: LU37RD10TW (Tilted at 0°, 1500lm); 15° Wattage: 12.60W Delivered Lumens: 1875.1 lm Luminaire LPW: 144.46 lm/W	Degress Vertical0° <table><tr><td>0</td><td>6046</td></tr><tr><td>5</td><td>5225</td></tr><tr><td>15</td><td>1621</td></tr><tr><td>25</td><td>293</td></tr><tr><td>35</td><td>21</td></tr><tr><td>45</td><td>6</td></tr><tr><td>55</td><td>4</td></tr><tr><td>65</td><td>3</td></tr><tr><td>75</td><td>0</td></tr><tr><td>85</td><td>0</td></tr><tr><td>90</td><td>0</td></tr></table>	0	6046	5	5225	15	1621	25	293	35	21	45	6	55	4	65	3	75	0	85	0	90	0	Distance to Target PlaneCenter Beam FootcandlesBeam Diameter <table><tr><td>4'</td><td>378</td><td>1.6'</td></tr><tr><td>6'</td><td>168</td><td>2.4'</td></tr><tr><td>8'</td><td>94.5</td><td>3.2'</td></tr><tr><td>10'</td><td>60.5</td><td>4.0'</td></tr></table> ZONAL LUMEN SUMMARY <table><tr><th>Zone</th><th>Lumens</th><th>%Luminaire</th></tr><tr><td>0-30°</td><td>1,115.7</td><td>97.3</td></tr><tr><td>0-40°</td><td>1,138.3</td><td>99.3</td></tr><tr><td>0-60°</td><td>1,144.6</td><td>99.9</td></tr><tr><td>0-90°</td><td>1,146.2</td><td>100</td></tr></table>	4'	378	1.6'	6'	168	2.4'	8'	94.5	3.2'	10'	60.5	4.0'	Zone	Lumens	%Luminaire	0-30°	1,115.7	97.3	0-40°	1,138.3	99.3	0-60°	1,144.6	99.9	0-90°	1,146.2	100
0	6046																																																		
5	5225																																																		
15	1621																																																		
25	293																																																		
35	21																																																		
45	6																																																		
55	4																																																		
65	3																																																		
75	0																																																		
85	0																																																		
90	0																																																		
4'	378	1.6'																																																	
6'	168	2.4'																																																	
8'	94.5	3.2'																																																	
10'	60.5	4.0'																																																	
Zone	Lumens	%Luminaire																																																	
0-30°	1,115.7	97.3																																																	
0-40°	1,138.3	99.3																																																	
0-60°	1,144.6	99.9																																																	
0-90°	1,146.2	100																																																	
PHOTOMETRIC REPORT	CANDLE POWER SUMMARY	ILLUMINANCE AT A DISTANCE																																																	
Product #: LU37RD10TW (Tilted at 0°, 1500lm); 24° Wattage: 12.62W Delivered Lumens: 1875.1 lm Luminaire LPW: 148.58 lm/W	Degress Vertical0° <table><tr><td>0</td><td>4849</td></tr><tr><td>5</td><td>4376</td></tr><tr><td>15</td><td>1917</td></tr><tr><td>25</td><td>520</td></tr><tr><td>35</td><td>54</td></tr><tr><td>45</td><td>6</td></tr><tr><td>55</td><td>4</td></tr><tr><td>65</td><td>3</td></tr><tr><td>75</td><td>0</td></tr><tr><td>85</td><td>0</td></tr><tr><td>90</td><td>0</td></tr></table>	0	4849	5	4376	15	1917	25	520	35	54	45	6	55	4	65	3	75	0	85	0	90	0	Distance to Target PlaneCenter Beam FootcandlesBeam Diameter <table><tr><td>4'</td><td>303</td><td>1.8'</td></tr><tr><td>6'</td><td>135</td><td>2.7'</td></tr><tr><td>8'</td><td>75.8</td><td>3.5'</td></tr><tr><td>10'</td><td>48.5</td><td>4.4'</td></tr></table> ZONAL LUMEN SUMMARY <table><tr><th>Zone</th><th>Lumens</th><th>%Luminaire</th></tr><tr><td>0-30°</td><td>1,115.9</td><td>96.1</td></tr><tr><td>0-40°</td><td>1,153.8</td><td>99.3</td></tr><tr><td>0-60°</td><td>1,160.0</td><td>99.9</td></tr><tr><td>0-90°</td><td>1,161.6</td><td>100</td></tr></table>	4'	303	1.8'	6'	135	2.7'	8'	75.8	3.5'	10'	48.5	4.4'	Zone	Lumens	%Luminaire	0-30°	1,115.9	96.1	0-40°	1,153.8	99.3	0-60°	1,160.0	99.9	0-90°	1,161.6	100
0	4849																																																		
5	4376																																																		
15	1917																																																		
25	520																																																		
35	54																																																		
45	6																																																		
55	4																																																		
65	3																																																		
75	0																																																		
85	0																																																		
90	0																																																		
4'	303	1.8'																																																	
6'	135	2.7'																																																	
8'	75.8	3.5'																																																	
10'	48.5	4.4'																																																	
Zone	Lumens	%Luminaire																																																	
0-30°	1,115.9	96.1																																																	
0-40°	1,153.8	99.3																																																	
0-60°	1,160.0	99.9																																																	
0-90°	1,161.6	100																																																	
PHOTOMETRIC REPORT	CANDLE POWER SUMMARY	ILLUMINANCE AT A DISTANCE																																																	
Product #: LU37RD10TW (Tilted at 0°, 1500lm); 36° Wattage: 12.66W Delivered Lumens: 1875.1 lm Luminaire LPW: 148.11 lm/W	Degress Vertical0° <table><tr><td>0</td><td>2372</td></tr><tr><td>5</td><td>2276</td></tr><tr><td>15</td><td>1621</td></tr><tr><td>25</td><td>717</td></tr><tr><td>35</td><td>175</td></tr><tr><td>45</td><td>6</td></tr><tr><td>55</td><td>5</td></tr><tr><td>65</td><td>5</td></tr><tr><td>75</td><td>1</td></tr><tr><td>85</td><td>0</td></tr><tr><td>90</td><td>0</td></tr></table>	0	2372	5	2276	15	1621	25	717	35	175	45	6	55	5	65	5	75	1	85	0	90	0	Distance to Target PlaneCenter Beam FootcandlesBeam Diameter <table><tr><td>4'</td><td>148</td><td>2.9'</td></tr><tr><td>6'</td><td>65.9</td><td>4.4'</td></tr><tr><td>8'</td><td>37.1</td><td>5.8'</td></tr><tr><td>10'</td><td>23.7</td><td>7.3'</td></tr></table> ZONAL LUMEN SUMMARY <table><tr><th>Zone</th><th>Lumens</th><th>%Luminaire</th></tr><tr><td>0-30°</td><td>1,014.5</td><td>89.5</td></tr><tr><td>0-40°</td><td>1,119.9</td><td>98.8</td></tr><tr><td>0-60°</td><td>1,130.2</td><td>99.7</td></tr><tr><td>0-90°</td><td>1,133.4</td><td>100</td></tr></table>	4'	148	2.9'	6'	65.9	4.4'	8'	37.1	5.8'	10'	23.7	7.3'	Zone	Lumens	%Luminaire	0-30°	1,014.5	89.5	0-40°	1,119.9	98.8	0-60°	1,130.2	99.7	0-90°	1,133.4	100
0	2372																																																		
5	2276																																																		
15	1621																																																		
25	717																																																		
35	175																																																		
45	6																																																		
55	5																																																		
65	5																																																		
75	1																																																		
85	0																																																		
90	0																																																		
4'	148	2.9'																																																	
6'	65.9	4.4'																																																	
8'	37.1	5.8'																																																	
10'	23.7	7.3'																																																	
Zone	Lumens	%Luminaire																																																	
0-30°	1,014.5	89.5																																																	
0-40°	1,119.9	98.8																																																	
0-60°	1,130.2	99.7																																																	
0-90°	1,133.4	100																																																	
PHOTOMETRIC REPORT	CANDLE POWER SUMMARY	ILLUMINANCE AT A DISTANCE																																																	
Product #: LU37RD10TW (Tilted at 0°, 1500lm); 50° Wattage: 12.93W Delivered Lumens: 1875.1 lm Luminaire LPW: 145.01 lm/W	Degress Vertical0° <table><tr><td>0</td><td>1393</td></tr><tr><td>5</td><td>1430</td></tr><tr><td>15</td><td>1297</td></tr><tr><td>25</td><td>926</td></tr><tr><td>35</td><td>364</td></tr><tr><td>45</td><td>12</td></tr><tr><td>55</td><td>5</td></tr><tr><td>65</td><td>5</td></tr><tr><td>75</td><td>1</td></tr><tr><td>85</td><td>0</td></tr><tr><td>90</td><td>0</td></tr></table>	0	1393	5	1430	15	1297	25	926	35	364	45	12	55	5	65	5	75	1	85	0	90	0	Distance to Target PlaneCenter Beam FootcandlesBeam Diameter <table><tr><td>4'</td><td>80.7</td><td>4.0'</td></tr><tr><td>6'</td><td>38.7</td><td>6.1'</td></tr><tr><td>8'</td><td>21.8</td><td>8.1'</td></tr><tr><td>10'</td><td>13.9</td><td>10.1'</td></tr></table> ZONAL LUMEN SUMMARY <table><tr><th>Zone</th><th>Lumens</th><th>%Luminaire</th></tr><tr><td>0-30°</td><td>824.5</td><td>77.7</td></tr><tr><td>0-40°</td><td>1,027.6</td><td>96.9</td></tr><tr><td>0-60°</td><td>1,057.4</td><td>99.7</td></tr><tr><td>0-90°</td><td>1,060.7</td><td>100</td></tr></table>	4'	80.7	4.0'	6'	38.7	6.1'	8'	21.8	8.1'	10'	13.9	10.1'	Zone	Lumens	%Luminaire	0-30°	824.5	77.7	0-40°	1,027.6	96.9	0-60°	1,057.4	99.7	0-90°	1,060.7	100
0	1393																																																		
5	1430																																																		
15	1297																																																		
25	926																																																		
35	364																																																		
45	12																																																		
55	5																																																		
65	5																																																		
75	1																																																		
85	0																																																		
90	0																																																		
4'	80.7	4.0'																																																	
6'	38.7	6.1'																																																	
8'	21.8	8.1'																																																	
10'	13.9	10.1'																																																	
Zone	Lumens	%Luminaire																																																	
0-30°	824.5	77.7																																																	
0-40°	1,027.6	96.9																																																	
0-60°	1,057.4	99.7																																																	
0-90°	1,060.7	100																																																	





PHOTOMETRIC REPORT

3" Round Pinhole

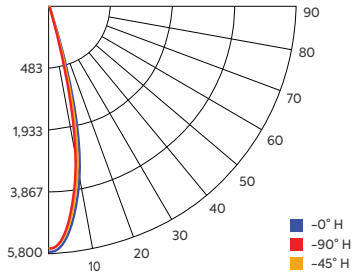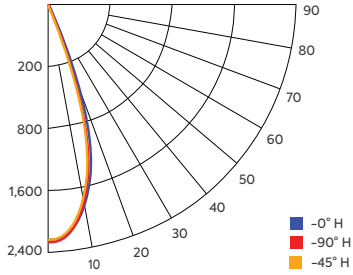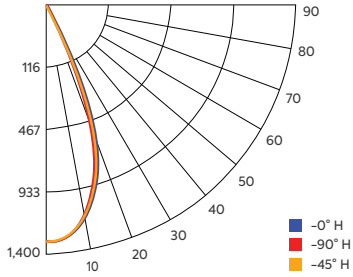PHOTOMETRIC REPORT	CANDLE POWER SUMMARY	ILLUMINANCE AT A DISTANCE
Product #: LU37RD27TW (Tilted at 0°, 1500lm); 15° Wattage: 12.98W Delivered Lumens: 1875.1 lm Luminaire LPW: 144.46 lm/W 	Degress Vertical0° 05581 55171 151891 25111 356 453 553 654 756 853 900	Distance to Target PlaneCenter Beam FootcandlesBeam Diameter 4'3491.4' 6'1552.1' 8'87.22.8' 10'55.83.5' ZONAL LUMEN SUMMARY ZoneLumens%Luminaire 0-30°798.198.5 0-40°801.898.9 0-60°805.799.4 0-90°810.4100
PHOTOMETRIC REPORT	CANDLE POWER SUMMARY	ILLUMINANCE AT A DISTANCE
Product #: LU37RD27TW (Tilted at 0°, 1500lm); 36° Wattage: 12.59W Delivered Lumens: 1875.1 lm Luminaire LPW: 148.93 lm/W 	Degress Vertical0° 02327 52234 151286 25288 355 453 554 656 758 854 900	Distance to Target PlaneCenter Beam FootcandlesBeam Diameter 4'1452.1' 6'64.63.2' 8'36.44.3' 10'23.35.4' ZONAL LUMEN SUMMARY ZoneLumens%Luminaire 0-30°627.397.7 0-40°630.698.2 0-60°635.599 0-90°642.0100
PHOTOMETRIC REPORT	CANDLE POWER SUMMARY	ILLUMINANCE AT A DISTANCE
Product #: LU37RD27TW (Tilted at 0°, 1500lm); 50° Wattage: 12.63W Delivered Lumens: 1875.1 lm Luminaire LPW: 148.46 lm/W 	Degress Vertical0° 01353 51328 151053 25464 354 452 554 656 758 854 900	Distance to Target PlaneCenter Beam FootcandlesBeam Diameter 4'84.63.0' 6'37.64.5' 8'21.15.9' 10'13.57.4' ZONAL LUMEN SUMMARY ZoneLumens%Luminaire 0-30°558.596.4 0-40°567.197.9 0-60°572.498.8 0-90°579.2100

PHOTOMETRIC REPORT

| 3" Round Wall Wash with Linear Lens

PHOTOMETRIC REPORT	CANDLE POWER SUMMARY	ILLUMINANCE AT A DISTANCE																																																	
Product #: LU37RD33T94W (1500lm); 15° Wattage: 12.87W Delivered Lumens: 1875.1 lm Luminaire LPW: 145.69 lm/W 	Degress Vertical0° <table><tr><td>0</td><td>620</td></tr><tr><td>5</td><td>611</td></tr><tr><td>15</td><td>550</td></tr><tr><td>25</td><td>447</td></tr><tr><td>35</td><td>329</td></tr><tr><td>45</td><td>218</td></tr><tr><td>55</td><td>115</td></tr><tr><td>65</td><td>36</td></tr><tr><td>75</td><td>8</td></tr><tr><td>85</td><td>2</td></tr><tr><td>90</td><td>0</td></tr></table>	0	620	5	611	15	550	25	447	35	329	45	218	55	115	65	36	75	8	85	2	90	0	Distance to Target PlaneCenter Beam FootcandlesBeam Diameter <table><tr><td>4'</td><td>38.7</td><td>3.6'</td></tr><tr><td>6'</td><td>17.2</td><td>5.4'</td></tr><tr><td>8'</td><td>9.68</td><td>7.2'</td></tr><tr><td>10'</td><td>6.20</td><td>9.0'</td></tr></table> ZONAL LUMEN SUMMARY <table><tr><th>Zone</th><th>Lumens</th><th>%Luminaire</th></tr><tr><td>0-30°</td><td>435.1</td><td>48.1</td></tr><tr><td>0-40°</td><td>643.1</td><td>71.1</td></tr><tr><td>0-60°</td><td>880.9</td><td>97.4</td></tr><tr><td>0-90°</td><td>904.8</td><td>100</td></tr></table>	4'	38.7	3.6'	6'	17.2	5.4'	8'	9.68	7.2'	10'	6.20	9.0'	Zone	Lumens	%Luminaire	0-30°	435.1	48.1	0-40°	643.1	71.1	0-60°	880.9	97.4	0-90°	904.8	100
0	620																																																		
5	611																																																		
15	550																																																		
25	447																																																		
35	329																																																		
45	218																																																		
55	115																																																		
65	36																																																		
75	8																																																		
85	2																																																		
90	0																																																		
4'	38.7	3.6'																																																	
6'	17.2	5.4'																																																	
8'	9.68	7.2'																																																	
10'	6.20	9.0'																																																	
Zone	Lumens	%Luminaire																																																	
0-30°	435.1	48.1																																																	
0-40°	643.1	71.1																																																	
0-60°	880.9	97.4																																																	
0-90°	904.8	100																																																	
PHOTOMETRIC REPORT	CANDLE POWER SUMMARY	ILLUMINANCE AT A DISTANCE																																																	
Product #: LU37RD33T94W (1500lm); 24° Wattage: 12.63W Delivered Lumens: 1875.1 lm Luminaire LPW: 148.46 lm/W 	Degress Vertical0° <table><tr><td>0</td><td>615</td></tr><tr><td>5</td><td>607</td></tr><tr><td>15</td><td>549</td></tr><tr><td>25</td><td>450</td></tr><tr><td>35</td><td>336</td></tr><tr><td>45</td><td>228</td></tr><tr><td>55</td><td>129</td></tr><tr><td>65</td><td>43</td></tr><tr><td>75</td><td>9</td></tr><tr><td>85</td><td>3</td></tr><tr><td>90</td><td>0</td></tr></table>	0	615	5	607	15	549	25	450	35	336	45	228	55	129	65	43	75	9	85	3	90	0	Distance to Target PlaneCenter Beam FootcandlesBeam Diameter <table><tr><td>4'</td><td>38.5</td><td>3.9'</td></tr><tr><td>6'</td><td>17.1</td><td>5.8'</td></tr><tr><td>8'</td><td>9.62</td><td>7.7'</td></tr><tr><td>10'</td><td>6.15</td><td>9.6'</td></tr></table> ZONAL LUMEN SUMMARY <table><tr><th>Zone</th><th>Lumens</th><th>%Luminaire</th></tr><tr><td>0-30°</td><td>429.7</td><td>46.8</td></tr><tr><td>0-40°</td><td>640.2</td><td>69.7</td></tr><tr><td>0-60°</td><td>893.2</td><td>97.2</td></tr><tr><td>0-90°</td><td>919.0</td><td>100</td></tr></table>	4'	38.5	3.9'	6'	17.1	5.8'	8'	9.62	7.7'	10'	6.15	9.6'	Zone	Lumens	%Luminaire	0-30°	429.7	46.8	0-40°	640.2	69.7	0-60°	893.2	97.2	0-90°	919.0	100
0	615																																																		
5	607																																																		
15	549																																																		
25	450																																																		
35	336																																																		
45	228																																																		
55	129																																																		
65	43																																																		
75	9																																																		
85	3																																																		
90	0																																																		
4'	38.5	3.9'																																																	
6'	17.1	5.8'																																																	
8'	9.62	7.7'																																																	
10'	6.15	9.6'																																																	
Zone	Lumens	%Luminaire																																																	
0-30°	429.7	46.8																																																	
0-40°	640.2	69.7																																																	
0-60°	893.2	97.2																																																	
0-90°	919.0	100																																																	
PHOTOMETRIC REPORT	CANDLE POWER SUMMARY	ILLUMINANCE AT A DISTANCE																																																	
Product #: LU37RD33T94W (1500lm); 36° Wattage: 12.62W Delivered Lumens: 1875.1 lm Luminaire LPW: 148.58 lm/W 	Degress Vertical0° <table><tr><td>0</td><td>552</td></tr><tr><td>5</td><td>549</td></tr><tr><td>15</td><td>510</td></tr><tr><td>25</td><td>436</td></tr><tr><td>35</td><td>342</td></tr><tr><td>45</td><td>241</td></tr><tr><td>55</td><td>133</td></tr><tr><td>65</td><td>38</td></tr><tr><td>75</td><td>10</td></tr><tr><td>85</td><td>3</td></tr><tr><td>90</td><td>0</td></tr></table>	0	552	5	549	15	510	25	436	35	342	45	241	55	133	65	38	75	10	85	3	90	0	Distance to Target PlaneCenter Beam FootcandlesBeam Diameter <table><tr><td>4'</td><td>34.5</td><td>4.5'</td></tr><tr><td>6'</td><td>15.3</td><td>6.8'</td></tr><tr><td>8'</td><td>8.62</td><td>9.0'</td></tr><tr><td>10'</td><td>5.52</td><td>11.3'</td></tr></table> ZONAL LUMEN SUMMARY <table><tr><th>Zone</th><th>Lumens</th><th>%Luminaire</th></tr><tr><td>0-30°</td><td>390.1</td><td>44.6</td></tr><tr><td>0-40°</td><td>593.1</td><td>67.8</td></tr><tr><td>0-60°</td><td>848.6</td><td>96.9</td></tr><tr><td>0-90°</td><td>875.4</td><td>100</td></tr></table>	4'	34.5	4.5'	6'	15.3	6.8'	8'	8.62	9.0'	10'	5.52	11.3'	Zone	Lumens	%Luminaire	0-30°	390.1	44.6	0-40°	593.1	67.8	0-60°	848.6	96.9	0-90°	875.4	100
0	552																																																		
5	549																																																		
15	510																																																		
25	436																																																		
35	342																																																		
45	241																																																		
55	133																																																		
65	38																																																		
75	10																																																		
85	3																																																		
90	0																																																		
4'	34.5	4.5'																																																	
6'	15.3	6.8'																																																	
8'	8.62	9.0'																																																	
10'	5.52	11.3'																																																	
Zone	Lumens	%Luminaire																																																	
0-30°	390.1	44.6																																																	
0-40°	593.1	67.8																																																	
0-60°	848.6	96.9																																																	
0-90°	875.4	100																																																	
PHOTOMETRIC REPORT	CANDLE POWER SUMMARY	ILLUMINANCE AT A DISTANCE																																																	
Product #: LU37RD33T94W (1500lm); 50° Wattage: 12.62W Delivered Lumens: 1875.1 lm Luminaire LPW: 148.58 lm/W 	Degress Vertical0° <table><tr><td>0</td><td>465</td></tr><tr><td>5</td><td>461</td></tr><tr><td>15</td><td>426</td></tr><tr><td>25</td><td>368</td></tr><tr><td>35</td><td>296</td></tr><tr><td>45</td><td>218</td></tr><tr><td>55</td><td>131</td></tr><tr><td>65</td><td>39</td></tr><tr><td>75</td><td>11</td></tr><tr><td>85</td><td>3</td></tr><tr><td>90</td><td>0</td></tr></table>	0	465	5	461	15	426	25	368	35	296	45	218	55	131	65	39	75	11	85	3	90	0	Distance to Target PlaneCenter Beam FootcandlesBeam Diameter <table><tr><td>4'</td><td>29.1</td><td>5.2'</td></tr><tr><td>6'</td><td>12.9</td><td>7.8'</td></tr><tr><td>8'</td><td>7.27</td><td>10.4'</td></tr><tr><td>10'</td><td>4.65</td><td>13.0'</td></tr></table> ZONAL LUMEN SUMMARY <table><tr><th>Zone</th><th>Lumens</th><th>%Luminaire</th></tr><tr><td>0-30°</td><td>337.4</td><td>41.7</td></tr><tr><td>0-40°</td><td>523.7</td><td>64.7</td></tr><tr><td>0-60°</td><td>781.4</td><td>96.5</td></tr><tr><td>0-90°</td><td>809.6</td><td>100</td></tr></table>	4'	29.1	5.2'	6'	12.9	7.8'	8'	7.27	10.4'	10'	4.65	13.0'	Zone	Lumens	%Luminaire	0-30°	337.4	41.7	0-40°	523.7	64.7	0-60°	781.4	96.5	0-90°	809.6	100
0	465																																																		
5	461																																																		
15	426																																																		
25	368																																																		
35	296																																																		
45	218																																																		
55	131																																																		
65	39																																																		
75	11																																																		
85	3																																																		
90	0																																																		
4'	29.1	5.2'																																																	
6'	12.9	7.8'																																																	
8'	7.27	10.4'																																																	
10'	4.65	13.0'																																																	
Zone	Lumens	%Luminaire																																																	
0-30°	337.4	41.7																																																	
0-40°	523.7	64.7																																																	
0-60°	781.4	96.5																																																	
0-90°	809.6	100																																																	