



WARNING:

Risk of electric shock. Before installation, disconnect power to the luminaire. Failure to do so may result in electric shock and lead to injury or death.

CAUTION:

For your safety, read and understand instructions completely prior to installation. Installation requires knowledge of luminaires electrical system. If not qualified, **DO NOT** attempt installation. Contact a qualified electrician if necessary.

NOTE: Before beginning the installation, carefully unpack and identify all parts. **Save these instructions, you may need them for later.** Downsizer Ring is for ELIUM® FLANGELESS Trims and SPACKLE FRAMES only. Maximum opening size is Ø9”.

Step 1: Clear the area around the opening and smooth out rough edges. The downsizer ring works best when installed against smooth, flat surfaces.

Step 2: Center the downsizer ring with the opening in the ceiling and make sure there is sufficient material on all sides of the opening **Fig. 1**.

Step 3: Hold the downsizer ring flush against the ceiling and screw it into place using #8 or #10 drywall screws. **Fig. 2**.

Note: Drywall screws must not be longer than ¾”.

Step 4: Apply plaster over the downsizer ring and spackle frame without letting any of the plaster into the hole opening of the housing. Use provided cardboard cutout to cover the hole opening while plastering if necessary **Fig. 3**.

Disclaimer: Any plastering or ceiling work must be done by a professional drywall.

Step 5: Install the ELIUM® LED Module onto the trim **Fig. 4**.

Disclaimer: Trim must be used with its intended spackle frame.

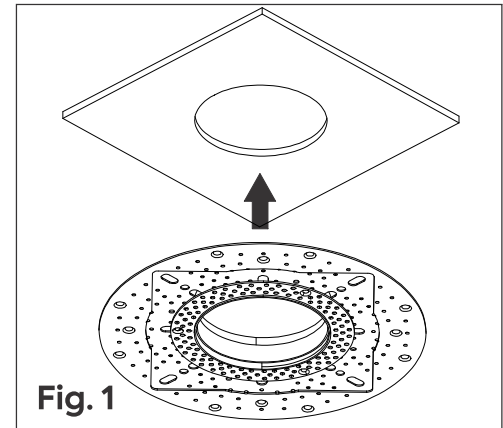


Fig. 1

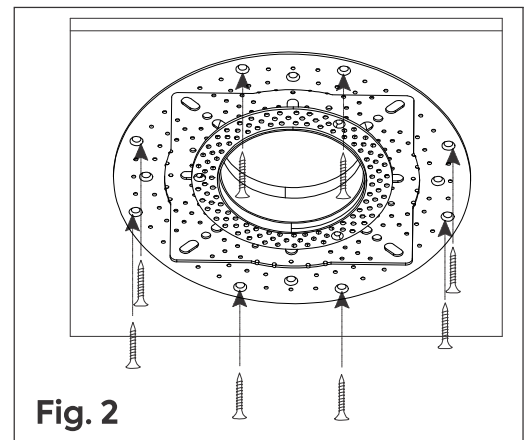


Fig. 2

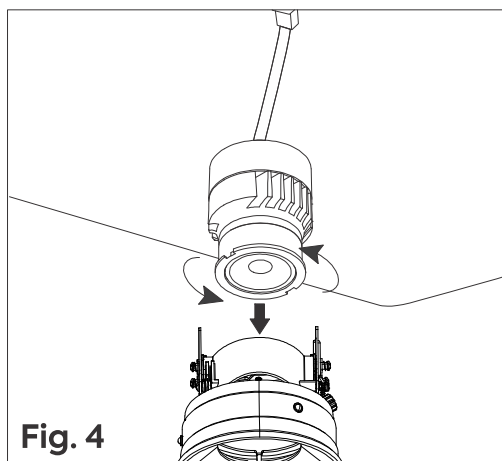


Fig. 4

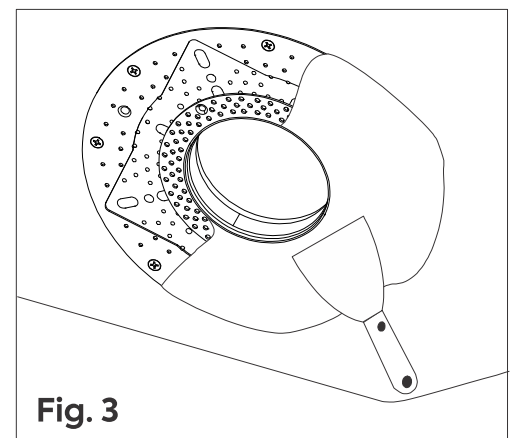


Fig. 3



WARNING:

Risk of electric shock. Before installation, disconnect power to the luminaire. Failure to do so may result in electric shock and lead to injury or death.

CAUTION:

For your safety, read and understand instructions completely prior to installation. Installation requires knowledge of luminaires electrical system. If not qualified, **DO NOT** attempt installation. Contact a qualified electrician if necessary.

NOTE: Before beginning the installation, carefully unpack and identify all parts. **Save these instructions, you may need them for later.** Downsizer Ring is for ELIUM® **FLANGELESS** Trims and Spackle Frames only. Maximum opening size is Ø9”.

Step 6: Mate the connector on the ELIUM® LED Module with the connector coming from the housing **Fig. 5**.

Step 7: Insert the LED module assembly through the opening of the spackle frame until fully engaged. The opening edge of the reflector should be flush with the face of the spackle frame **Fig. 6**.

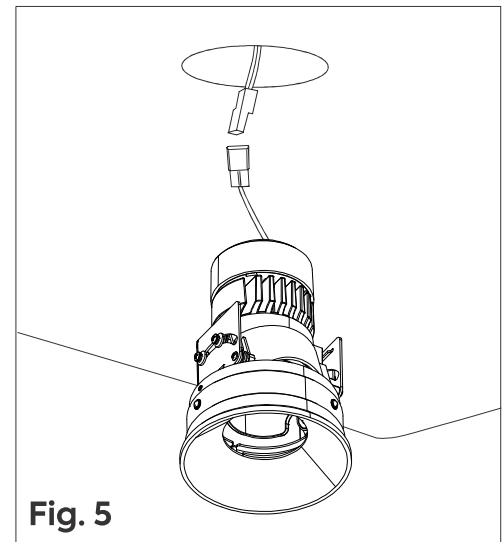


Fig. 5

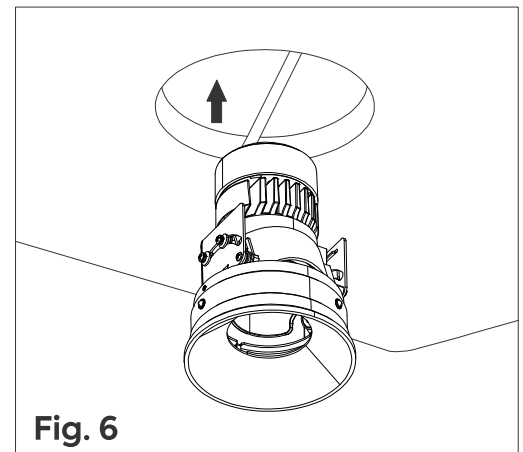


Fig. 6